


Features

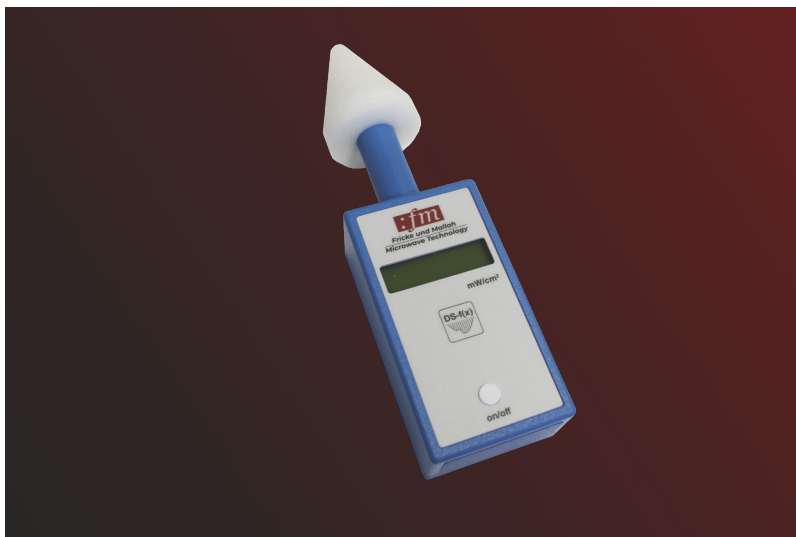


- Handheld-instrument
- LC display, 8 chars, backlight
- Digitally scanning of the E-field
- Determination of the effective value of the power density
- Improved rotation symmetry and directional characteristics
- Self-test after each power-on
- Acoustic signal at over-ranging
- Battery monitoring
- Working with 2 standard LR6 AA batteries
- Optionally with calibration certificate

Specification

Electrical and Technical Data

Range:	0..15 mW/cm ²
Precision - Devices for 2450 MHz:	+/-1 dB
Power density:	max. 1,0W/cm ²
Rotation symmetry:	Difference max. +/- 3 %
Operating temperature:	+10 °C to +40 °C
Power:	Batteries 2x 1,5 V LR6 AA approx. 1000 measurements with a battery set

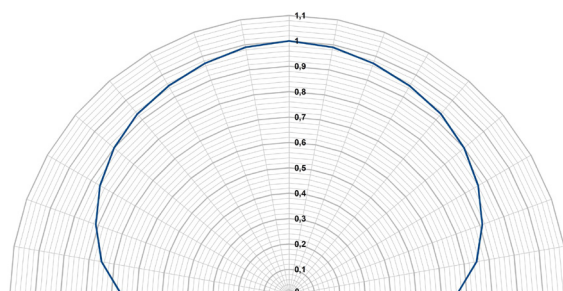

Directional characteristics

Mechanical Data

Dimension (mm):	240 x 65 x 50 mm
Weight:	155 g without batteries 200 g with batteries



Practical transport case