


## Features

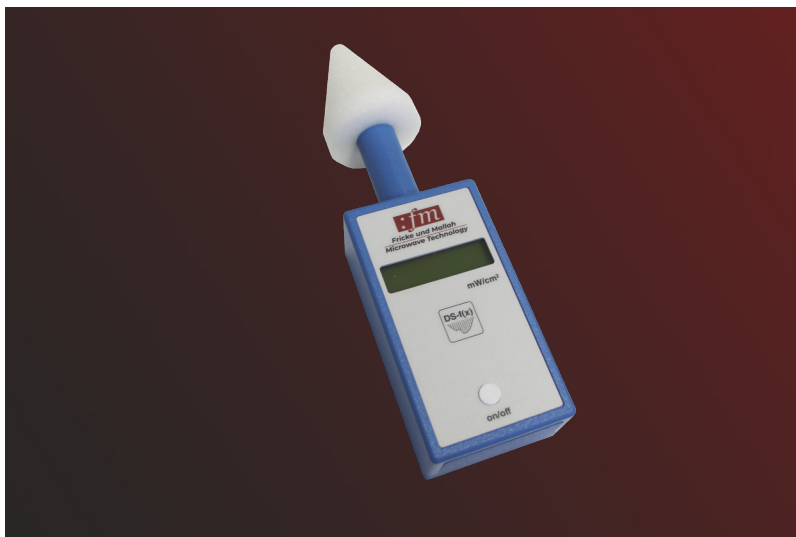


- Handheld-instrument
- LC display, 8 chars, backlight
- Digitally scanning of the E-field
- Determination of the effective value of the power density
- Improved rotation symmetry and directional characteristics
- Self-test after each power-on
- Acoustic signal at over-ranging
- Battery monitoring
- Working with 2 standard LR6 AA batteries
- Optionally with calibration certificate

## Specification

### Electrical and Technical Data

|                                  |  |
|----------------------------------|--|
| Range:                           | 0..15 mW/cm <sup>2</sup>                     |
| Precision - Devices for 915 MHz: | +/-1 dB                                      |
| Power density:                   | max. 1,0W/cm <sup>2</sup>                    |
| Rotation symmetry:               | Difference max. +/- 3 %                      |
| Operating temperature:           | +10 °C to +40 °C                             |
| Power:                           | Batteries 2x 1,5 V LR6 AA                    |
|                                  | approx. 1000 measurements with a battery set |

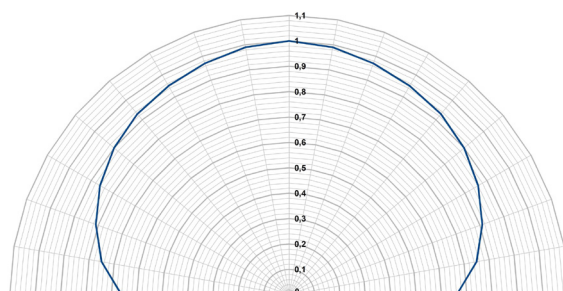

Directional characteristics

### Mechanical Data

|                 |                         |
|-----------------|-------------------------|
| Dimension (mm): | 240 x 65 x 50 mm        |
| Weight:         | 155 g without batteries |
|                 | 200 g with batteries    |



Practical transport case